


DDACL42-Re05 050/100

Lead(导程)5mm
Travel(行程)50/100mm

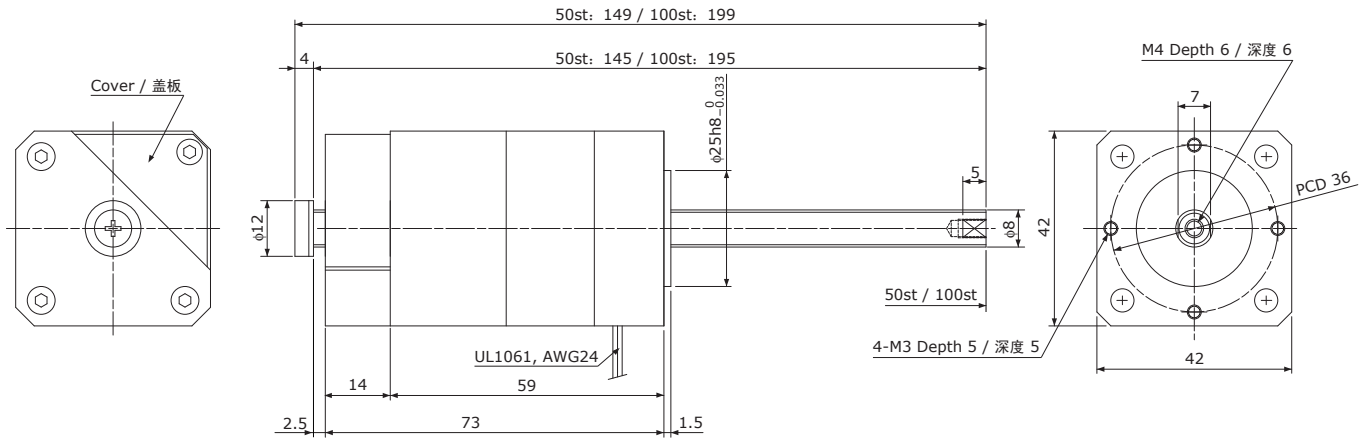

Motor lead wire / 电机线 (310mm)

A	Black (黑)
Ā	Green (绿)
B	Red (红)
B̄	Blue (蓝)

Specifications 规格	
Motor Frame Size 电机安装尺寸	NEMA17 (□42)
Drive Screw type 驱动丝杠	Resin Lead Screw 树脂螺母进给丝杠
Screw Lead 丝杠导程	5mm
Travel 行程	50mm / 100mm
Repeatability 重复定位精度	±0.030mm
Lost Motion 空转	0.060mm
Maximum Speed 最高速度	50mm/sec
Acceleration & Deceleration time 加减速时间	Min. 0.4sec 0.4sec以上
Thrust Force 推力	10N
Mass 重量	Travel 50mm/ 行程50mm : 490g Travel 100mm/ 行程100mm : 510g
Operating Temperature 使用温度范围	0~40°C (No Condensation) 0~40°C (无结露)

Motor Specifications 电机规格	
Driving method 励磁方式	2-phase Bi-polar 2相 bipolar 方式
Rated Voltage 额定电压	2.5V(DC)
Rated current 额定电流	1.2A/phase 1.2A/相
Winding resistance 绕线电阻	2.1 Ω
Insulation Class 绝缘等级	Class B (130°C) B种 (130°C)

注意事项

- CL型无止转结构
客户使用时需另装止转结构。
- 上述规格为垂直状态且移动初期的参考值。
- 标准规格没有装配传感器。
如有需要，请垂询KSS。

Precautions

- CL type does not have an anti-rotating device.
External anti-rotating device should be set up when usage.
- Specifications above are reference value measured in vertical position at virgin condition.
- Sensor is not built in this standard design.
Please ask KSS if necessary.