


NSRF0601 | Shaft dia. $\phi 6$ Lead 1mm

Ct7

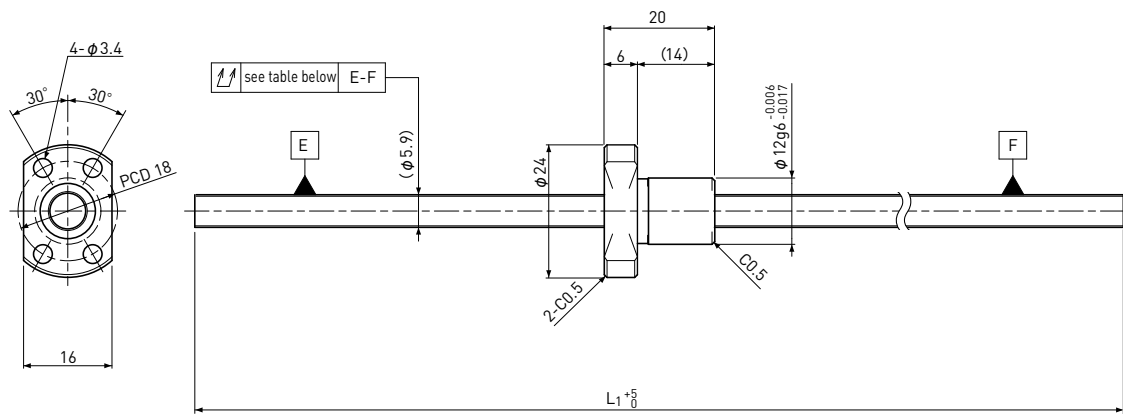

Unit:mm

Ball Screw Specifications		
BCD		$\phi 6.20$
Thread direction		Right
Material	Shaft	S55C
	Nut	SCM415H
Surface hardness		HRC58~62 (Thread area)
Anti-rust treatment		Anti-rust oil

Unit:mm

Ball Screw Model	Travel	Grade	Shaft length		Lead accuracy		Total Run-out 	Axial play	Preload Torque Nm	Basic Load Rating N	
			L ₁	L ₂	Travel deviation e _p	Variation V ₃₀₀				Dynamic Ca	Static Coa
NSRF0601-200R200C7	175	Ct7	200	—	±0.040	—	0.080	~0.020	—	560	950

Note) Please designate end-journal profile with your sketch.