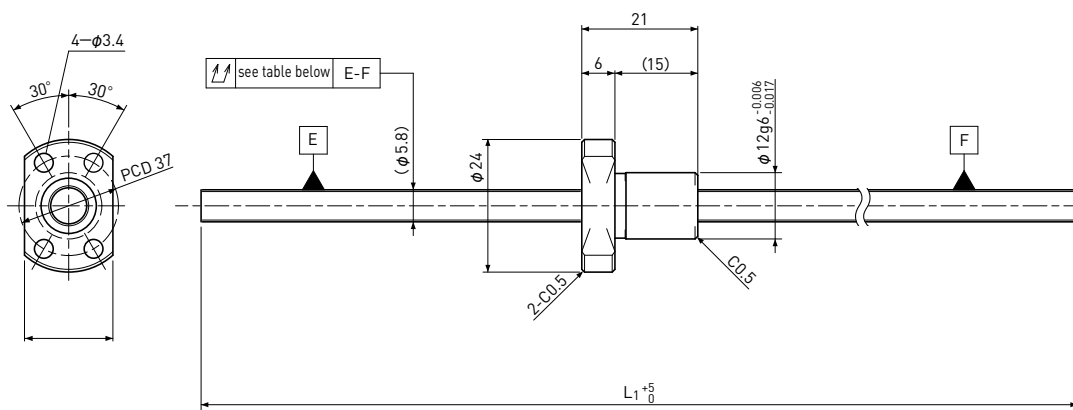


Standard products in stock NSRF series

NSRF0602 | Shaft dia. $\phi 6$ Lead 2mm**Ct7**

Unit: mm

Ball Screw Specifications		
BCD		$\phi 6.20$
Thread direction		Right
Material	Shaft	S55C
	Nut	SCM415H
Surface hardness		HRC58~62 (Thread area)
Anti-rust treatment		Anti-rust oil

Unit: mm

Ball Screw Model	Travel	Grade	Shaft length		Lead accuracy		Total Run-out	Axial play	Preload Torque Nm	Basic Load Rating N	
			L ₁	L ₂	Travel deviation e _p	Variation V ₃₀₀				Dynamic Ca	Static Coa
NSRF0602-200R200C7	175	Ct7	200	—	±0.040	—	0.080	~0.020	—	770	1150

Note) Please designate end-journal profile with your sketch.