


NSRF1004 | Shaft dia. $\phi 10$ Lead 4mm

Ct7

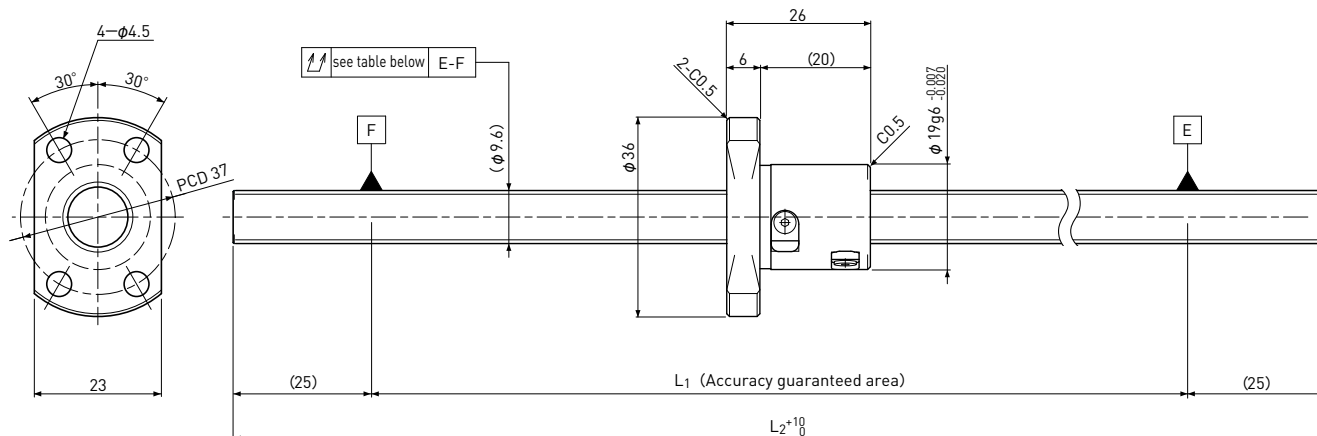

Unit:mm

Ball Screw Specifications	
BCD	$\phi 10.30$
Thread direction	Right
Shaft, Nut material	SCM415H
Surface hardness	HRC58~62 (Thread area)
Anti-rust treatment	Anti-rust oil

Unit:mm

Ball Screw Model	Travel	Grade	Shaft length		Lead accuracy		Total Run-out	Axial play	Preload Torque Nm	Basic Load Rating N	
			L ₁	L ₂	Travel deviation e _p	Variation V ₃₀₀				Dynamic Ca	Static Coa
NSRF1004-450R450C7	370	Ct7	400	450	± 0.069	0.052	0.120	~0.020	—	3000	5200

Note) Please designate end-journal profile with your sketch.